

A11101 780831

Bureau of Standards  
11 Admin. Bldg.

NAT'L INST OF STANDARDS & TECH R.I.C.



A11101780831

/The International system of units (SI)  
QC100 .U57 NO.330 V1971 C.1 NBS-PUB-R

FEB 17 1971

book not to be  
in the library.



NBS SPECIAL PUBLICATION 330

NIST  
PUBLICATIONS

REFERENCE

# The International System of Units (SI)

U.S.  
DEPARTMENT  
OF  
COMMERCE

National

QC

100

.U57

No.330

1971



## The International System of Units (SI)

Editors  
Chester H. Page  
and  
Paul Vigoureux

(Translation approved by the  
International Bureau of Weights and Measures  
of its publication "Le Système International  
d'Unités")



U.S. National Bureau of Standards, Special Publication 330

Nat. Bur. Stand. (U.S.), Spec. Publ. 330, 42 pages (Jan. 1971)  
CODEN: XNBSA

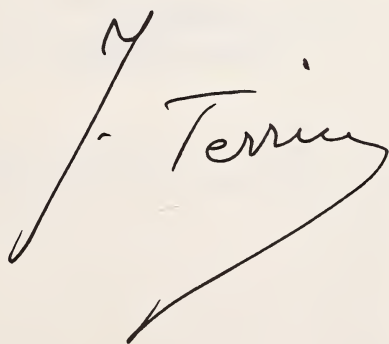
Issued January 1971

**Library of Congress Catalog Card Number: 73-608985**

# The International System of Units

## Foreword

This document, now published independently by the National Bureau of Standards, USA, and Her Majesty's Stationery Office, UK, is a translation of the French "*Le Système International d'Unités*" published by the International Bureau of Weights and Measures.\* It was prepared jointly by the National Physical Laboratory, UK, and the National Bureau of Standards, USA. The International Bureau of Weights and Measures has compared this translation with the French text and finds that it agrees with the intention and the letter of the original. The only difference between the English and American versions lies in the spelling of "caesium" and "black body" in the UK publication and "cesium" and "blackbody" in the USA publication. The International Bureau hopes that wide dissemination of this approved translation will promote knowledge and understanding of the International System of Units, encourage its use in all realms of science, industry, and commerce, and secure uniformity of nomenclature throughout the English-speaking world.

A handwritten signature in black ink, appearing to read "J. Terrien". The signature is fluid and cursive, with a long, sweeping underline that extends to the right.

J. Terrien  
Director  
BIPM

---

\* "*Le Système International d'Unités*," 1970, OFFILIB, 48 rue Gay-Lussac, F 75 Paris 5.

## Preface

The International Bureau of Weights and Measures (BIPM), in response to frequent requests, publishes this document containing Resolutions and Recommendations of the General Conference of Weights and Measures (CGPM) on the International System of Units. Explanations have been added as well as relevant extracts from the Recommendations of the International Organization for Standardization (ISO) for the practical use of the System.

The Consultative Committee for Units (CCU) of the International Committee of Weights and Measures (CIPM) helped to draft the document and has approved the final text.

Appendix I reproduces in chronological order the decisions (Resolutions, Recommendations, Declarations, etc.) promulgated since 1889 by the CGPM and the CIPM on units of measurement and on the International System of Units.

Appendix II outlines the measurements, consistent with the theoretical definitions given here, which metrological laboratories can make to realize the units and to calibrate precision material standards.

J. TERRIEN  
Director, BIPM

J. de BOER  
President, CCU

# The International System of Units

## Contents

	Page
Foreword .....	III
Preface .....	IV
I. <i>Introduction</i> .....	1
I.1 Historical note .....	1
I.2 The three classes of SI units .....	2
II. <i>SI Units</i> .....	3
II.1 Base units .....	3
1. Definitions .....	3
2. Symbols .....	6
II.2 Derived units .....	6
1. Expressions .....	6
2. Recommendations .....	10
II.3 Supplementary units .....	11
III. <i>Decimal multiples and sub-multiples of SI units</i> .....	12
III.1 SI prefixes .....	12
III.2 Recommendations .....	12
III.3 The kilogram .....	12
IV. <i>Units outside the International System</i> .....	13
IV.1 Units used with the International System .....	13
IV.2 Units accepted temporarily .....	15
IV.3 CGS units .....	16
IV.4 Other units .....	17
Appendix I. Decisions of the CGPM and the CIPM .....	18
Appendix II. Practical realization of the definitions of some important units .....	35





# I. INTRODUCTION

## I.1 Historical note

In 1948 the 9th CGPM<sup>1</sup>, by its Resolution 6, instructed the CIPM<sup>1</sup>: “to study the establishment of a complete set of rules for units of measurement”; “to find out for this purpose, by official inquiry, the opinion prevailing in scientific, technical, and educational circles in all countries” and “to make recommendations on the establishment of a *practical system of units of measurement* suitable for adoption by all signatories to the Metre Convention.”

The same General Conference also laid down, by its Resolution 7, general principles for unit symbols (see II.1.2, page 6) and also gave a list of units with special names.

The 10th CGPM (1954), by its Resolution 6, adopted as base units of this “practical system of units”, the units of the following six quantities: length, mass, time, electric current, thermodynamic temperature, and luminous intensity (see II.1, page 3).

The 11th CGPM (1960), by its Resolution 12, finally adopted the name *International System of Units*, with the international abbreviation SI, for this practical system of units of measurement and laid down rules for the prefixes (see III.1, page 12), the derived and supplementary units (see II.2.2, page 10 and II.3, page 11) and other matters, thus establishing a comprehensive specification for units of measurement.

In the present document the expressions “SI units”, “SI prefixes”, “supplementary units” are used in accordance with Recommendation 1 (1969) of the CIPM.

Improvements and extensions of this specification have already become necessary; some of them have reached a sufficiently advanced stage to be incorporated in this document, although the CGPM has not yet given its final approval; in particular, in accordance with the proposed Resolution approved by the CIPM in October 1969, the mole is here treated as a base unit.

---

<sup>1</sup> For the meaning of these abbreviations, see the preface.

## I.2 The three classes of SI units

SI units are divided into three classes:

- base units,
- derived units,
- supplementary units.

From the scientific point of view division of SI units into these three classes is to a certain extent arbitrary, because it is not essential to the physics of the subject.

Nevertheless the General Conference, considering the advantages of a single, practical, worldwide system for international relations, for teaching and for scientific work, decided to base the International System on a choice of six well-defined units: the metre, the kilogram, the second, the ampere, the kelvin, and the candela (see II.1, page 3). These SI units are called *base units*.<sup>2, 3</sup>

The second class of SI units contains *derived units*, i.e., units that can be formed by combining base units according to the algebraic relations linking the corresponding quantities. Several of these algebraic expressions in terms of base units can be replaced by special names and symbols which can themselves be used to form other derived units (see II.2, page 6).

Although it might be thought that SI units can only be base units or derived units, the 11th CGPM (1960) admitted a third class of SI units, called *supplementary units*, for which it declined to state whether they were base units or derived units (see II.3, page 11).

The SI units of these three classes form a coherent set in the sense normally attributed to the expression "coherent system of units".

The decimal multiples and sub-multiples of SI units formed by means of SI prefixes must be given their full name *multiples and sub-multiples of SI units* when it is desired to make a distinction between them and the coherent set of SI units.

---

<sup>2</sup> The 13th CGPM (1967) considered the introduction of the mole into the International System and instructed the CIPM to prepare a draft accordingly. In 1969 the CIPM approved a draft resolution for submission to the 14th CGPM (1971) to the effect that the mole should be declared a base unit (See II.1.1.g, page 5).

<sup>3</sup> *Translators' note.* The spellings "metre" and "kilogram" are used in this USA/UK translation in the hope of securing worldwide uniformity in the English spelling of the names of the units of the International System.

## II. SI UNITS

### II.1 Base units

#### 1. Definitions

a) *Unit of length.*—The 11th CGPM (1960) replaced the definition of the metre based on the international prototype of platinum-iridium, in force since 1889 and amplified in 1927, by the following definition:

*The metre is the length equal to 1 650 763.73 wavelengths in vacuum of the radiation corresponding to the transition between the levels  $2p_{10}$  and  $5d_5$  of the krypton-86 atom.* (11th CGPM (1960), Resolution 6).

The old international prototype of the metre which was legalized by the 1st CGPM in 1889 is still kept at the International Bureau of Weights and Measures under the conditions specified in 1889.

b) *Unit of mass.*—The 1st CGPM (1889) legalized the international prototype of the kilogram and declared: *this prototype shall henceforth be considered to be the unit of mass.*

With the object of removing the ambiguity which still occurred in the common use of the word “weight”, the 3rd CGPM (1901) declared: *the kilogram is the unit of mass* [and not of weight or of force]; *it is equal to the mass of the international prototype of the kilogram.*

This international prototype made of platinum-iridium is kept at the BIPM under conditions specified by the 1st CGPM in 1889.

c) *Unit of time.*—Originally the unit of time, the second, was defined as the fraction  $1/86\,400$  of the mean solar day. The exact definition of “mean solar day” was left to astronomers, but their measurements have shown that on account of irregularities in the rotation of the Earth the mean solar day does not guarantee the desired accuracy. In order to define the unit of time more precisely the 11th CGPM (1960) adopted a definition given by the International Astronomical Union which was based on the tropical year. Experimental work had however already shown that an atomic standard of time-interval, based on a transition between two energy levels of an atom or a molecule, could be realized and reproduced much more accurately. Considering that a very precise definition of the unit of time of the International System, the second, is indispensable for the needs of advanced metrology, the 13th CGPM (1967) decided to replace the definition of the second by the following:

*The second is the duration of 9 192 631 770 periods of the radiation corresponding to the transition between the two hyperfine levels of the ground state of the cesium-133 atom.* (13th CGPM (1967), Resolution 1).

*d) Unit of electric current.*—Electric units, called “international”, for current and resistance, had been introduced by the International Electrical Congress held in Chicago in 1893, and the definitions of the “international” ampere and the “international” ohm were confirmed by the International Conference of London in 1908.

Although it was already obvious on the occasion of the 8th CGPM (1933) that there was a unanimous desire to replace those “international” units by so-called “absolute” units, the official decision to abolish them was only taken by the 9th CGPM (1948), which adopted for the unit of electric current, the ampere, the following definition:

*The ampere is that constant current which, if maintained in two straight parallel conductors of infinite length, of negligible circular cross section, and placed 1 metre apart in vacuum, would produce between these conductors a force equal to  $2 \times 10^{-7}$  newton per metre of length.* (CIPM (1946), Resolution 2 approved by the 9th CGPM, 1948)

The expression “MKS unit of force” which occurs in the original text has been replaced here by “newton” adopted by the 9th CGPM (1948, Resolution 7).

*e) Unit of thermodynamic temperature.*—The definition of the unit of thermodynamic temperature was given in substance by the 10th CGPM (1954, Resolution 3) which selected the triple point of water as fundamental fixed point and assigned to it the temperature 273.16 °K by definition. The 13th CGPM (1967, Resolution 3) adopted the name *kelvin* (symbol K) instead of “degree Kelvin” (symbol °K) and in its Resolution 4 defined the unit of thermodynamic temperature as follows:

*The kelvin, unit of thermodynamic temperature, is the fraction  $1/273.16$  of the thermodynamic temperature of the triple point of water.* (13th CGPM (1967), Resolution 4).

The 13th CGPM (1967, Resolution 3) also decided that the unit kelvin and its symbol K should be used to express an interval or a difference of temperature.

*Note.*—In addition to the thermodynamic temperature (symbol  $T$ ), expressed in kelvins, use is also made of Celsius temperature (symbol  $t$ ) defined by the equation

$$t = T - T_0$$

where  $T_0 = 273.15$  K by definition. The Celsius temperature is in general expressed in degrees Celsius (symbol °C). The unit “degree Celsius” is thus equal to the unit “kelvin” and an interval or a difference of Celsius temperature may also be expressed in degrees Celsius.

*f) Unit of luminous intensity.*—The units of luminous intensity based on flame or incandescent filament standards in use in various countries were replaced in 1948 by the “new candle”. This decision



had been prepared by the International Commission on Illumination (CIE) and by the CIPM before 1937, and was promulgated by the CIPM at its meeting in 1946 in virtue of powers conferred on it in 1933 by the 8th CGPM. The 9th CGPM (1948) ratified the decision of the CIPM and gave a new international name, *candela* (symbol *cd*), to the unit of luminous intensity. The text of the definition of the candela, as amended in 1967, is as follows:

*The candela is the luminous intensity, in the perpendicular direction, of a surface of 1/600 000 square metre of a blackbody at the temperature of freezing platinum under a pressure of 101 325 newtons per square metre.* (13th CGPM (1967), Resolution 5).

g) *Unit of amount of substance.*—Since the discovery of the fundamental laws of chemistry, units of amount of substance called, for instance, “gram-atom” and “gram-molecule”, have been used to specify amounts of chemical elements or compounds. These units had a direct connection with “atomic weights” and “molecular weights”. “Atomic weights” were originally referred to the atomic weight of oxygen (by general agreement taken as 16). But whereas physicists separated isotopes in the mass spectrograph and attributed the value 16 to one of the isotopes of oxygen, chemists attributed that same value to the (slightly variable) mixture of isotopes 16, 17, and 18, which was for them the naturally occurring element oxygen. Finally an agreement between the International Union of Pure and Applied Physics (IUPAP) and the International Union of Pure and Applied Chemistry (IUPAC) brought this duality to an end in 1959/60. Physicists and chemists have ever since agreed to assign the value 12 to the isotope 12 of carbon.

The unified scale thus obtained gives values of “relative atomic mass”. The mass corresponding to the unit of amount of carbon 12 still remained to be fixed; by international agreement it has been fixed at 0.012 kg and the unit of the quantity “amount of substance” has been given the name *mole* (symbol *mol*).

Following proposals of IUPAP, IUPAC, and ISO, the CIPM gave in 1967, and confirmed in 1969, the following definition of the mole, unit of amount of substance:

*The mole is the amount of substance of a system which contains as many elementary entities as there are atoms in 0.012 kilogram of carbon 12.*

Note. *When the mole is used, the elementary entities must be specified and may be atoms, molecules, ions, electrons, other particles, or specified groups of such particles.*

In 1969 the CIPM decided to propose to the 14th CGPM (1971) to introduce the mole as base unit in the International System of Units, with the definition given above. Note that this definition

specifies at the same time the nature of the quantity whose unit is the mole.<sup>4</sup>

## 2. Symbols

The base units of the International System are collected in table 1 with their names and their symbols (10th CGPM (1954), Resolution 6; 11th CGPM (1960), Resolution 12; 13th CGPM (1967), Resolution 3; CIPM (1967 and 1969)).

TABLE 1

*SI base units*

Quantity	Name	Symbol
length .....	metre	m
mass .....	kilogram	kg
time .....	second	s
electric current .....	ampere	A
thermodynamic temperature .....	kelvin	K
luminous intensity .....	candela	cd
amount of substance .....	mole	mol

The general principle governing the writing of unit symbols had already been adopted by the 9th CGPM (1948), Resolution 7, according to which:

*Roman (upright) type, in general lower case, is used for symbols of units; if however the symbols are derived from proper names, capital roman type is used [for the first letter]. These symbols are not followed by a full stop (period).*

Unit symbols do not change in the plural.

## II.2 Derived units

### 1. Expressions

Derived units are expressed algebraically in terms of base units by means of the mathematical symbols of multiplication and division. Several derived units have been given special names and symbols which may themselves be used to express other derived units in a simpler way than in terms of the base units.

Derived units may therefore be classified under three headings. Some of them are given in tables 2, 3, and 4.

<sup>4</sup>The name of this quantity, adopted by IUPAP, IUPAC, and ISO is in French "quantité de matière", and in English "amount of substance"; (the German and Russian translations are "Stoffmenge" and "количество вещества"). The French name recalls "quantitas materiae" by which in the past the quantity now called mass used to be known; we must forget this old meaning, for mass and amount of substance are entirely different quantities.

TABLE 2  
*Examples of SI derived units  
expressed in terms of base units*

Quantity	SI unit	
	Name	Symbol
area	square metre	$\text{m}^2$
volume	cubic metre	$\text{m}^3$
speed, velocity	metre per second	$\text{m/s}$
acceleration	metre per second squared	$\text{m/s}^2$
wave number	1 per metre	$\text{m}^{-1}$
density, mass density	kilogram per cubic metre	$\text{kg/m}^3$
concentration (of amount of substance)	mole per cubic metre	$\text{mol/m}^3$
activity (radioactive)	1 per second	$\text{s}^{-1}$
specific volume	cubic metre per kilogram	$\text{m}^3/\text{kg}$
luminance	candela per square metre	$\text{cd/m}^2$

TABLE 3

*SI derived units with special names*

Quantity	SI unit			
	Name	Symbol	Expression in terms of other units	Expression in terms of SI base units
frequency	hertz	Hz		$s^{-1}$
force	newton	N		$m \cdot kg \cdot s^{-2}$
pressure	pascal <sup>(a)</sup>	Pa	$N/m^2$	$m^{-1} \cdot kg \cdot s^{-2}$
energy, work, quantity of heat	joule	J	$N \cdot m$	$m^2 \cdot kg \cdot s^{-2}$
power, radiant flux	watt	W	$J/s$	$m^2 \cdot kg \cdot s^{-3}$
quantity of electricity, electric charge	coulomb	C	$A \cdot s$	$s \cdot A$
potential difference, electromotive force	volt	V	$W/A$	$m^2 \cdot kg \cdot s^{-3} \cdot A^{-1}$
capacitance	farad	F	$C/V$	$m^{-2} \cdot kg^{-1} \cdot s^4 \cdot A^2$
electric resistance	ohm	$\Omega$	$V/A$	$m^2 \cdot kg \cdot s^{-3} \cdot A^{-2}$
conductance	siemens <sup>(a)</sup>	S	$A/V$	$m^{-2} \cdot kg^{-1} \cdot s^3 \cdot A^2$
magnetic flux	weber	Wb	$V \cdot s$	$m^2 \cdot kg \cdot s^{-2} \cdot A^{-1}$
magnetic flux density	tesla	T	$Wb/m^2$	$kg \cdot s^{-2} \cdot A^{-1}$
inductance	henry	H	$Wb/A$	$m^2 \cdot kg \cdot s^{-2} \cdot A^{-2}$
luminous flux	lumen	lm		$cd \cdot sr$ <sup>(b)</sup>
illuminance	lux	lx		$m^{-2} \cdot cd \cdot sr$ <sup>(b)</sup>

(a) In 1969 the CIPM decided to seek approval of the 14th CGPM for this special name and its symbol.

(b) In this expression the steradian (sr) is treated as a base unit.



TABLE 4  
Examples of SI derived units  
expressed by means of special names

Quantity	SI unit		
	Name	Symbol	Expression in terms of SI base units
dynamic viscosity	pascal second	Pa·s	$\text{m}^{-1} \cdot \text{kg} \cdot \text{s}^{-1}$
moment of force	metre newton	N·m	$\text{m}^2 \cdot \text{kg} \cdot \text{s}^{-2}$
surface tension	newton per metre	N/m	$\text{kg} \cdot \text{s}^{-2}$
heat flux density, irradiance	watt per square metre	W/m <sup>2</sup>	$\text{kg} \cdot \text{s}^{-3}$
heat capacity, entropy	joule per kelvin	J/K	$\text{m}^2 \cdot \text{kg} \cdot \text{s}^{-2} \cdot \text{K}^{-1}$
specific heat capacity, specific entropy	joule per kilogram kelvin	J/(kg·K)	$\text{m}^2 \cdot \text{s}^{-2} \cdot \text{K}^{-1}$
specific energy	joule per kilogram	J/kg	$\text{m}^2 \cdot \text{s}^{-2}$
thermal conductivity	watt per metre kelvin	W/(m·K)	$\text{m} \cdot \text{kg} \cdot \text{s}^{-3} \cdot \text{K}^{-1}$
energy density	joule per cubic metre	J/m <sup>3</sup>	$\text{m}^{-1} \cdot \text{kg} \cdot \text{s}^{-2}$
electric field strength	volt per metre	V/m	$\text{m} \cdot \text{kg} \cdot \text{s}^{-3} \cdot \text{A}^{-1}$
electric charge density	coulomb per cubic metre	C/m <sup>3</sup>	$\text{m}^{-3} \cdot \text{s} \cdot \text{A}$
electric flux density	coulomb per square metre	C/m <sup>2</sup>	$\text{m}^{-2} \cdot \text{s} \cdot \text{A}$
permittivity	farad per metre	F/m	$\text{m}^{-3} \cdot \text{kg}^{-1} \cdot \text{s}^4 \cdot \text{A}^2$
current density	ampere per square metre	A/m <sup>2</sup>	
magnetic field strength	ampere per metre	A/m	
permeability	henry per metre	H/m	$\text{m} \cdot \text{kg} \cdot \text{s}^{-2} \cdot \text{A}^{-2}$
molar energy	joule per mole	J/mol	$\text{m}^2 \cdot \text{kg} \cdot \text{s}^{-2} \cdot \text{mol}^{-1}$
molar entropy, molar heat capacity	joule per mole kelvin	J/(mol·K)	$\text{m}^2 \cdot \text{kg} \cdot \text{s}^{-2} \cdot \text{K}^{-1} \cdot \text{mol}^{-1}$

*Note.*—The values of certain so-called dimensionless quantities, as for example refractive index, relative permeability or relative permittivity, are expressed by pure numbers. In this case the corresponding SI unit is the ratio of the same two SI units and may be expressed by the number 1.

## 2. Recommendations

The International Organization for Standardization (ISO) has issued additional recommendations with the aim of securing uniformity in the use of units, in particular those of the International System (see the series of Recommendations R 31 and Recommendation R 1000 of Technical Committee ISO/TC 12 “Quantities, units, symbols, conversion factors and conversion tables”).

According to these recommendations:

a) The product of two or more units is preferably indicated by a dot. The dot may be dispensed with when there is no risk of confusion with another unit symbol

*for example:* N•m or N m *but not:* mN

b) A solidus (oblique stroke, /), a horizontal line, or negative powers may be used to express a derived unit formed from two others by division

*for example:* m/s,  $\frac{\text{m}}{\text{s}}$  or  $\text{m}\cdot\text{s}^{-1}$

c) The solidus must not be repeated on the same line unless ambiguity is avoided by parentheses. In complicated cases negative powers or parentheses should be used

*for example:*  $\text{m}/\text{s}^2$  or  $\text{m}\cdot\text{s}^{-2}$  *but not:* m/s/s  
 $\text{m}\cdot\text{kg}/(\text{s}^3\cdot\text{A})$  or  $\text{m}\cdot\text{kg}\cdot\text{s}^{-3}\cdot\text{A}^{-1}$   $\text{m}\cdot\text{kg}/\text{s}^3/\text{A}$

## II.3 Supplementary units

The General Conference has not yet classified certain units of the International System under either base units or derived units. These SI units are assigned to the third class called "supplementary units", and may be regarded either as base units or as derived units.

For the time being this class contains only two, purely geometrical, units: the SI unit of plane angle, the *radian*, and the SI unit of solid angle, the *steradian* (11th CGPM (1960), Resolution 12).

TABLE 5

*SI supplementary units*

Quantity	SI unit	
	Name	Symbol
plane angle	radian	rad
solid angle	steradian	sr

*The radian is the plane angle between two radii of a circle which cut off on the circumference an arc equal in length to the radius.*

*The steradian is the solid angle which, having its vertex in the center of a sphere, cuts off an area of the surface of the sphere equal to that of a square with sides of length equal to the radius of the sphere.*

(ISO Recommendation R 31, part 1, second edition, December 1965).

Supplementary units may be used to form derived units. Examples are given in table 6.

TABLE 6

*Examples of SI derived units formed by using supplementary units*

Quantity	SI unit	
	Name	Symbol
angular velocity	radian per second	rad/s
angular acceleration	radian per second squared	rad/s <sup>2</sup>
radiant intensity	watt per steradian	W/sr
radiance	watt per square metre steradian	W·m <sup>-2</sup> ·sr <sup>-1</sup>

### III. DECIMAL MULTIPLES AND SUB-MULTIPLES OF SI UNITS

#### III.1 SI Prefixes

The 11th CGPM (1960, Resolution 12) adopted a first series of names and symbols of prefixes to form decimal multiples and sub-multiples of SI units. Prefixes for  $10^{-15}$  and  $10^{-18}$  were added by the 12th CGPM (1964, Resolution 8).

TABLE 7

*SI prefixes*

Factor	Prefix	Symbol	Factor	Prefix	Symbol
$10^{12}$	tera	T	$10^{-1}$	deci	d
$10^9$	giga	G	$10^{-2}$	centi	c
$10^6$	mega	M	$10^{-3}$	milli	m
$10^3$	kilo	k	$10^{-6}$	micro	$\mu$
$10^2$	hecto	h	$10^{-9}$	nano	n
$10^1$	deka	da	$10^{-12}$	pico	p
			$10^{-15}$	femto	f
			$10^{-18}$	atto	a

#### III.2 Recommendations

ISO recommends the following rules for the use of SI prefixes:

a) Prefix symbols are printed in roman (upright) type without spacing between the prefix symbol and the unit symbol.

b) An exponent affixed to a symbol containing a prefix indicates that the multiple or sub-multiple of the unit is raised to the power expressed by the exponent,

$$\begin{aligned} \text{for example: } 1 \text{ cm}^3 &= 10^{-6} \text{ m}^3 \\ 1 \text{ cm}^{-1} &= 10^2 \text{ m}^{-1} \end{aligned}$$

c) Compound prefixes are to be avoided,

$$\text{for example: } 1 \text{ nm} \quad \text{but not: } 1 \text{ m}\mu\text{m}$$

#### III.3 The kilogram

Among the base units of the International System, the unit of mass is the only one whose name, for historical reasons, contains a prefix. Names of decimal multiples and sub-multiples of the unit of mass are formed by attaching prefixes to the word "gram" (CIPM (1967), Recommendation 2).

## IV. UNITS OUTSIDE THE INTERNATIONAL SYSTEM

### IV.1 Units used with the International System

The CIPM (1969) recognized that users of SI will also wish to employ certain units which, although not part of it, are in wide-spread use. These units play such an important part that they must be retained for general use with the International System of Units. They are given in table 8.

TABLE 8

*Units in use with the International System*

Name	Symbol	Value in SI unit
minute	min	1 min = 60 s
hour <sup>(a)</sup>	h	1 h = 60 min = 3 600 s
day	d	1 d = 24 h = 86 400 s
degree	°	1° = ( $\pi/180$ ) rad
minute	'	1' = (1/60)° = ( $\pi/10\,800$ ) rad
second	''	1'' = (1/60)' = ( $\pi/648\,000$ ) rad
litre <sup>(a)</sup>	l	1 l = 1 dm <sup>3</sup> = 10 <sup>-3</sup> m <sup>3</sup>
tonne <sup>(a)</sup>	t	1 t = 10 <sup>3</sup> kg

<sup>(a)</sup> The symbol of this unit is included in Resolution 7 of the 9th CGPM (1948). The litre is defined in Resolution 6 of the 12th CGPM (1964).

It is likewise necessary to recognize, outside the International System, some other units which are useful in specialized fields of scientific research, because their values expressed in SI units must be obtained by experiment, and are therefore not known exactly (table 9).

TABLE 9  
*Units used with the International System  
in specialized fields*

Name	Symbol	Definition
electronvolt	eV	(a)
unified atomic mass unit	u	(b)
astronomical unit	AU	(c)
parsec	pc	(d)

(a) 1 electronvolt is the energy acquired by an electron in passing through a potential difference of 1 volt in vacuum;  $1 \text{ eV} \approx 1.602 \, 19 \times 10^{-19} \text{ J}$  approximately.

(b) The unified atomic mass unit is equal to the fraction  $1/12$  of the mass of an atom of the nuclide  $^{12}\text{C}$ ;  $1 \text{ u} = 1.660 \, 53 \times 10^{-27} \text{ kg}$  approximately.

(c) The astronomical unit of distance is the length of the radius of the unperturbed circular orbit of a body of negligible mass moving round the Sun with a sidereal angular velocity of  $0.017 \, 202 \, 098 \, 950$  radian per day of  $86 \, 400$  ephemeris seconds. In the system of astronomical constants of the International Astronomical Union the value adopted for it is:  $1 \text{ AU} = 149 \, 600 \times 10^6 \text{ m}$ .

In French, the symbol UA is used.

(d) 1 parsec is the distance at which 1 astronomical unit subtends an angle of 1 second of arc; we thus have approximately,  $1 \text{ pc} = 206 \, 265 \text{ AU} = 30 \, 857 \times 10^{12} \text{ m}$ .



## IV.2 Units accepted temporarily

In view of existing practice the CIPM (1969) considered it was preferable to keep for the time being, for use with those of the International System, the units listed in table 10.

TABLE 10  
*Units to be used with the  
International System for a limited time*

Name	Symbol	Value in SI units
nautical mile <sup>(a)</sup>		1 nautical mile = 1 852 m
knot		1 nautical mile per hour = (1852/3600) m/s
ångström	Å	1 Å = 0.1 nm = 10 <sup>-10</sup> m
are <sup>(b)</sup>	a	1 a = 1 dam <sup>2</sup> = 10 <sup>2</sup> m <sup>2</sup>
hectare <sup>(b)</sup>	ha	1 ha = 1 hm <sup>2</sup> = 10 <sup>4</sup> m <sup>2</sup>
barn <sup>(c)</sup>	b	1 b = 100 fm <sup>2</sup> = 10 <sup>-28</sup> m <sup>2</sup>
bar <sup>(d)</sup>	bar	1 bar = 0.1 MPa = 10 <sup>5</sup> Pa
standard atmosphere <sup>(e)</sup>	atm	1 atm = 101 325 Pa
gal <sup>(f)</sup>	Gal	1 Gal = 1 cm/s <sup>2</sup> = 10 <sup>-2</sup> m/s <sup>2</sup>
curie <sup>(g)</sup>	Ci	1 Ci = 3.7 × 10 <sup>10</sup> s <sup>-1</sup>
röntgen <sup>(h)</sup>	R	1 R = 2.58 × 10 <sup>-4</sup> C/kg
rad <sup>(i)</sup>	rad	1 rad = 10 <sup>-2</sup> J/kg

(a) The nautical mile is a special unit employed for marine and aerial navigation to express distances. The conventional value given above was adopted by the First International Extraordinary Hydrographic Conference, Monaco, 1929, under the name "International nautical mile".

(b) This unit and its symbol were adopted by the CIPM in 1879 (*Procès-Verbaux CIPM*, 1879, p. 41).

(c) The barn is a special unit employed in nuclear physics to express effective cross sections.

(d) This unit and its symbol are included in Resolution 7 of the 9th CGPM (1948).

(e) Resolution 4 of 10th CGPM (1954).

(f) The gal is a special unit employed in geodesy and geophysics to express the acceleration due to gravity.

(g) The curie is a special unit employed in nuclear physics to express activity of radionuclides (12th CGPM (1964), Resolution 7).

(h) The röntgen is a special unit employed to express exposure of X or γ radiations.

(i) The rad is a special unit employed to express absorbed dose of ionizing radiations. When there is risk of confusion with the symbol for radian, rd may be used as symbol for rad.

### IV.3 CGS units

The CIPM considers that it is in general preferable not to use, with the units of the International System, CGS units which have special names<sup>5</sup>. Such units are listed in table 11.

TABLE 11

*CGS units with special names*

Name	Symbol	Value in SI units
erg <sup>(a)</sup>	erg	1 erg = 10 <sup>-7</sup> J
dyne <sup>(a)</sup>	dyn	1 dyn = 10 <sup>-5</sup> N
poise <sup>(a)</sup>	P	1 P = 1 dyn•s/cm <sup>2</sup> = 0.1 Pa•s
stokes	St	1 St = 1 cm <sup>2</sup> /s = 10 <sup>-4</sup> m <sup>2</sup> /s
gauss <sup>(b)</sup>	Gs, G	1 Gs corresponds to 10 <sup>-4</sup> T
oersted <sup>(b)</sup>	Oe	1 Oe corresponds to $\frac{1000}{4\pi}$ A/m
maxwell <sup>(b)</sup>	Mx	1 Mx corresponds to 10 <sup>-8</sup> Wb
stilb <sup>(a)</sup>	sb	1 stilb = 1 cd/cm <sup>2</sup> = 10 <sup>4</sup> cd/m <sup>2</sup>
phot	ph	1 ph = 10 <sup>4</sup> lx

(a) This unit and its symbol were included in Resolution 7 of the 9th CGPM (1948).

(b) This unit is part of the so-called "electromagnetic" 3-dimensional CGS system and cannot strictly speaking be compared to the corresponding unit of the 4-dimensional International System.

<sup>5</sup> The aim of the International System of Units and of the recommendations contained in this document is to secure a greater degree of uniformity, hence a better mutual understanding of the general use of units. Nevertheless in certain specialized fields of scientific research, in particular in theoretical physics, there may sometimes be very good reasons for using other systems or other units.

Whichever units are used, it is important that the *symbols* employed for them follow current international recommendations.



## IV.4 Other units

As regards units outside the International System which do not come under sections IV.1, 2, and 3, the CIPM considers that it is in general preferable to avoid them, and to use instead units of the International System. Some of those units are listed in table 12.

TABLE 12

*Other units generally deprecated*

Name	Value in SI units
fermi	1 fermi = 1 fm = $10^{-15}$ m
metric carat <sup>(a)</sup>	1 metric carat = 200 mg = $2 \times 10^{-4}$ kg
torr	1 torr = $\frac{101\ 325}{760}$ Pa
kilogram-force (kgf)	1 kgf = 9.806 65 N
calorie (cal)	1 cal = 4.186 8 J <sup>(b)</sup>
micron ( $\mu$ ) <sup>(c)</sup>	1 $\mu$ = 1 $\mu$ m = $10^{-6}$ m
X unit <sup>(d)</sup>	
stere (st) <sup>(e)</sup>	1 st = 1 m <sup>3</sup>
gamma ( $\gamma$ )	1 $\gamma$ = 1 nT = $10^{-9}$ T
$\gamma$ <sup>(f)</sup>	1 $\gamma$ = 1 $\mu$ g = $10^{-9}$ kg
$\lambda$ <sup>(g)</sup>	1 $\lambda$ = 1 $\mu$ l = $10^{-6}$ l

(a) This name was adopted by the 4th CGPM (1907, pp. 89-91) for commercial dealings in diamonds, pearls, and precious stones.

(b) This value is that of the so-called "IT" calorie (5th International Conference on Properties of Steam, London, 1956).

(c) The name of this unit and its symbol, adopted by the CIPM in 1879 (*Procès-Verbaux CIPM*, 1879, p. 41) and retained in Resolution 7 of the 9th CGPM (1948) were abolished by the 13th CGPM (1967, Resolution 7).

(d) This special unit was employed to express wavelengths of X rays; 1 X unit =  $1.002 \times 10^{-4}$  nm approximately.

(e) This special unit employed to measure firewood was adopted by the CIPM in 1879 with the symbol "s" (*Procès-Verbaux CIPM*, 1879, p. 41). The 9th CGPM (1948, Resolution 7) changed the symbol to "st".

(f) This symbol is mentioned in *Procès-Verbaux CIPM*, 1880, p. 56.

(g) This symbol is mentioned in *Procès-Verbaux CIPM*, 1880, p. 30.

## APPENDIX I

### Decisions of the CGPM and the CIPM

CR: *Comptes rendus des séances de la Conférence Générale des Poids et Mesures (CGPM)*

PV: *Procès-Verbaux des séances du Comité International des Poids et Mesures (CIPM)*

#### 1st CGPM, 1889

*Sanction of the international prototypes of the metre and the kilogram (CR, 34-38)*

The General Conference  
*considering*

the "Compte rendu of the President of the CIPM" and the "Report of the CIPM", which show that, by the collaboration of the French section of the international Metre Commission and of the CIPM, the fundamental measurements of the international and national prototypes of the metre and of the kilogram have been made with all the accuracy and reliability which the present state of science permits; that the international and national prototypes of the metre and the kilogram are made of an alloy of platinum with 10 per cent iridium, to within 0.000 1; the equality in length of the international Metre and the equality in mass of the international Kilogram with the length of the Metre and the mass of the Kilogram kept in the Archives of France;

that the differences between the national Metres and the international Metre lie within 0.01 millimetre and that these differences are based on a hydrogen thermometer scale which can always be reproduced thanks to the stability of hydrogen, provided identical conditions are secured;

that the differences between the national Kilograms and the international Kilogram lie within 1 milligram;

that the international Metre and Kilogram and the national Metres and Kilograms fulfil the requirements of the Metre Convention,

*sanctions*

A. As regards international prototypes:

1 The Prototype of the metre chosen by the CIPM.

This prototype, at the temperature of melting ice, shall henceforth represent the metric unit of length.

2 The Prototype of the kilogram adopted by the CIPM.

This prototype shall henceforth be considered as the unit of mass.

3 The hydrogen thermometer centigrade scale in terms of which the equations of the prototype Metres have been established.

B. As regards national prototypes:

.....

### 3rd CGPM, 1901

*Declaration concerning the definition of the litre (CR, 38)*

.....

*The Conference declares:*

1 The unit of volume, for high accuracy determinations, is the volume occupied by a mass of 1 kilogram of pure water, at its maximum density and at standard atmospheric pressure; this volume is called "litre".

2 .....

*Declaration on the unit of mass and on the definition of weight; conventional value of  $g_n$  (CR, 70)*

Taking into account the decision of the CIPM of the 15 October 1887, according to which the kilogram has been defined as a unit of mass<sup>6</sup>;

Taking into account the decision contained in the sanction of the prototypes of the Metric System, unanimously accepted by the CGPM on the 26 September 1889;

Considering the necessity to put an end to the ambiguity which in current practice still subsists on the meaning of the word *weight*, used sometimes for *mass*, sometimes for *mechanical force*;

*The Conference declares:*

"1 The kilogram is the unit of mass; it is equal to the mass of the international prototype of the kilogram;

"2 The word *weight* denotes a quantity of the same nature as a *force*; the weight of a body is the product of its mass and the acceleration due to gravity; in particular, the standard weight of a body is the product of its mass and the standard acceleration due to gravity;

"3 The value adopted in the international Service of Weights and Measures for the standard acceleration due to gravity is 980.665 cm/s<sup>2</sup>, value already stated in the laws of some countries."

<sup>6</sup> "The mass of the international Kilogram is taken as unit for the international Service of Weights and Measures" (PV, 1887, 88).

<sup>7</sup> *Note of BIPM.* This conventional reference "standard value" ( $g_n = 9.806\,65\text{ m/s}^2$ ) to be used in the reduction to standard gravity of measurements made in some place on the Earth has been reconfirmed in 1913 by the 5th CGPM (CR, 44).

## 7th CGPM, 1927

### *Definition of the metre by the international Prototype (CR, 49)*

The unit of length is the metre, defined by the distance, at  $0^{\circ}$ , between the axes of the two central lines marked on the bar of platinum-iridium kept at the BIPM, and declared Prototype of the metre by the 1st CGPM, this bar being subject to standard atmospheric pressure and supported on two cylinders of at least one centimetre diameter, symmetrically placed in the same horizontal plane at a distance of 571 mm from each other.

## CIPM, 1946

### *Definitions of photometric units (PV, 20, 119)*

#### RESOLUTION<sup>8</sup>

.....

4. The photometric units may be defined as follows:

*New candle* (unit of luminous intensity).—The value of the new candle is such that the brightness of the full radiator at the temperature of solidification of platinum is 60 new candles per square centimetre.

*New lumen* (unit of luminous flux).—The new lumen is the luminous flux emitted in unit solid angle (steradian) by a uniform point source having a luminous intensity of 1 new candle.

5. ....

### *Definitions of electric units (PV, 20, 131)*

#### RESOLUTION 2<sup>9</sup>

.....

4. A) Definitions of the mechanical units which enter the definitions of electric units:

*Unit of force*.—The unit of force [in the MKS (Metre, Kilogram, Second) system] is the force which gives to a mass of 1 kilogram an acceleration of 1 metre per second, per second (\*).

\* The name "newton" has been proposed for the MKS unit of force.

<sup>8</sup> The two definitions contained in this Resolution were ratified by the 9th CGPM (1948), which also approved the name *candela* given to the "new candle" (CR, 54). For the lumen the qualifier "new" was later abandoned.

<sup>9</sup> The definitions contained in this Resolution 2 were approved by the 9th CGPM (1948), (CR, 49), which moreover adopted the name *newton* (Resolution 7).

*Joule* (unit of energy or work).—The joule is the work done when the point of application of 1 MKS unit of force [newton] moves a distance of 1 metre in the direction of the force.

*Watt* (unit of power).—The watt is the power which in one second gives rise to energy of 1 joule.

B) Definitions of electric units. The CIPM accepts the following propositions which define the theoretical value of the electric units:

*Ampere* (unit of electric current).—The ampere is that constant current which, if maintained in two straight parallel conductors of infinite length, of negligible circular cross-section, and placed 1 metre apart in vacuum, would produce between these conductors a force equal to  $2 \times 10^{-7}$  MKS unit of force [newton] per metre of length.

*Volt* (unit of potential difference and of electromotive force).—The volt is the difference of electric potential between two points of a conducting wire carrying a constant current of 1 ampere, when the power dissipated between these points is equal to 1 watt.

*Ohm* (unit of electric resistance).—The ohm is the electric resistance between two points of a conductor when a constant potential difference of 1 volt, applied to these points, produces in the conductor a current of 1 ampere, the conductor not being the seat of any electromotive force.

*Coulomb* (unit of quantity of electricity).—The coulomb is the quantity of electricity carried in 1 second by a current of 1 ampere.

*Farad* (unit of electric capacitance).—The farad is the capacitance of a capacitor between the plates of which there appears a potential difference of 1 volt when it is charged by a quantity of electricity of 1 coulomb.

*Henry* (unit of electric inductance).—The henry is the inductance of a closed circuit in which an electromotive force of 1 volt is produced when the electric current in the circuit varies uniformly at the rate of 1 ampere per second.

*Weber* (unit of magnetic flux).—The weber is the magnetic flux which, linking a circuit of one turn, would produce in it an electromotive force of 1 volt if it were reduced to zero at a uniform rate in 1 second.



## 9th CGPM, 1948

*Triple point of water; thermodynamic scale with a single fixed point; unit of quantity of heat (joule) (CR, 55 and 63)*

### RESOLUTION 3<sup>10</sup>

1. With present-day technique, the triple point of water is capable of providing a thermometric reference point with an accuracy higher than can be obtained from the melting point of ice.

In consequence the Consultative Committee [for Thermometry and Calorimetry] considers that the zero of the centesimal thermodynamic scale must be defined as the temperature 0.010 0 degree below that of the triple point of pure water.

2. The CCTC accepts the principle of an absolute thermodynamic scale with a single fundamental fixed point, at present provided by the triple point of pure water, the absolute temperature of which will be fixed at a later date.

The introduction of this new scale does not affect in any way the use of the International Scale, which remains the recommended practical scale.

3. The unit of quantity of heat is the joule.

*Note.*—It is requested that the results of calorimetric experiments be as far as possible expressed in joules.

If the experiments are made by comparison with the rise of temperature of water (and that, for some reason, it is not possible to avoid using the calorie), the information necessary for conversion to joules must be provided.

The CIPM, advised by the CCTC, should prepare a table giving, in joules per degree, the most accurate values that can be obtained from experiments on the specific heat of water.

#### *Adoption of "degree Celsius"*

From three names ("degree centigrade", "centesimal degree", "degree Celsius") proposed to denote the degree of temperature, the CIPM has chosen "degree Celsius" (PV, 21, 1948, 88).

This name is also adopted by the General Conference (CR, 64).

<sup>10</sup> The three propositions contained in this Resolution 3 have been adopted by the General Conference.

*Proposal for establishing a practical system of units of measurement* (CR, 64).

#### RESOLUTION 6

The General Conference,  
*considering*

that the CIPM has been requested by the International Union of Physics to adopt for international use a practical international system of units; that the International Union of Physics recommends the MKS system and one electric unit of the absolute practical system, but does not recommend that the CGS system be abandoned by physicists;

that the CGPM has itself received from the French Government a similar request, accompanied by a draft to be used as basis of discussion for the establishment of a complete specification of units of measurement;

*instructs* the CIPM:

to seek by an energetic, active, official enquiry the opinion of scientific, technical, and educational circles of all countries (offering them in effect the French document as basis) ;

to gather and study the answers;

to make recommendations for a single practical system of units of measurement, suitable for adoption by all countries adhering to the Metre Convention.

*Writing and printing of unit symbols and of numbers*

#### RESOLUTION 7

##### *Principles*

Roman (upright) type, in general lower case, is used for symbols of units; if however the symbols are derived from proper names, capital roman type is used. These symbols are not followed by a full stop.

In numbers, the comma (French practice) or the dot (British practice) are used only to separate the integral part of numbers from the decimal part. Numbers may be divided in groups of three in order to facilitate reading; neither dots nor commas are ever inserted in the spaces between groups.

Unit	Symbol	Unit	Symbol
.metre -----	m	ampere -----	A
.square metre -----	m <sup>2</sup>	volt -----	V
.cubic metre -----	m <sup>3</sup>	watt -----	W
.micron -----	μ	ohm -----	Ω
.litre -----	l	coulomb -----	C
.gram -----	g	farad -----	F
.tonne -----	t	henry -----	H
second -----	s	hertz -----	Hz
erg -----	erg	poise -----	P
dyne -----	dyn	newton -----	N
degree Celsius -----	°C	.candela ("new candle") -----	cd
.degree absolute -----	°K	lux -----	lx
calorie -----	cal	lumen -----	lm
bar -----	bar	stilb -----	sb
hour -----	h		

### Notes

1. The symbols whose unit names are preceded by dots are those which had already been adopted by a decision of the CIPM.

2. The symbol for the stère, the unit of volume for firewood, shall be "st" and not "s", which had been previously assigned to it by the CIPM.

3. To indicate a temperature interval or difference, rather than a temperature, the word "degree" in full, or the abbreviation "deg", must be used.

## 10th CGPM, 1954

*Definition of the thermodynamic temperature scale* (CR, 79)

### RESOLUTION 3

The 10th CGPM decides to define the thermodynamic temperature scale by choosing the triple point of water as the fundamental fixed point, and assigning to it the temperature 273.16 degrees Kelvin, exactly.

*Definition of standard atmosphere* (CR, 79)

### RESOLUTION 4

The 10th CGPM, having noted that the definition of the standard atmosphere given by the 9th CGPM when defining the International Temperature Scale, led some physicists to believe that this definition of the standard atmosphere was valid only for accurate work in thermometry,



*declares* that it adopts, for general use, the definition :

1 standard atmosphere = 1 013 250 dynes per square centimetre,  
i.e., 101 325 newtons per square metre.

*Practical system of units* (CR, 80)

#### RESOLUTION 6

In accordance with the wish expressed by the 9th CGPM in its Resolution 6 concerning the establishment of a practical system of units of measurement for international use, the 10th CGPM

*decides* to adopt as base units of the system, the following units :

length -----	metre
mass -----	kilogram
time -----	second
electric current -----	ampere
thermodynamic temperature -----	degree Kelvin
luminous intensity -----	candela

#### CIPM, 1956

*Definition of the unit of time* (PV, 25, 77)

#### RESOLUTION 1

In virtue of the powers invested in it by Resolution 5 of the 10th CGPM, the CIPM

*considering*

1 that the 9th General Assembly of the International Astronomical Union (Dublin, 1955) declared itself in favor of linking the second to the tropical year;

2 that, according to the decisions of the 8th General Assembly of the International Astronomical Union (Rome, 1952), the second of ephemeris time (ET) is the fraction  $\frac{12\ 960\ 276\ 813}{408\ 986\ 496} \times 10^{-9}$  of the tropical year for 1900 January 0 at 12 h ET,

*decides*

“The second is the fraction  $1/31\ 556\ 925.974\ 7$  of the tropical year for 1900 January 0 at 12 hours ephemeris time”.

*International System of Units* (PV, 25, 83)

#### RESOLUTION 3

The CIPM

*considering*

the task entrusted to it by Resolution 6 of the 9th CGPM concerning the establishment of a practical system of units of measurement suitable for adoption by all countries adhering to the Metre Convention,

the documents received from twenty-one countries in reply to the enquiry requested by the 9th CGPM,

Resolution 6 of the 10th CGPM, fixing the base units of the system to be established

*recommends*

1 that the name "International System of Units" be given to the system founded on the base units adopted by the 10th CGPM, viz:

[here follows the list of the six base units with their symbols, reproduced in Resolution 12 of the 11th CGPM (1960)]

2 that the units listed in the table below be used, without excluding others which might be added later:

[here follows the table of units reproduced in paragraph 4 of Resolution 12 of the 11th CGPM (1960)]

## 11th CGPM, 1960

*Definition of the metre* (CR, 85)

### RESOLUTION 6

The 11th CGPM

*considering*

that the international Prototype does not define the metre with an accuracy adequate for the present needs of metrology,

that it is moreover desirable to adopt a natural and indestructible standard,

*decides*

1 The metre is the length equal to 1 650 763.73 wavelengths in vacuum of the radiation corresponding to the transition between the levels  $2p_{10}$  and  $5d_5$  of the krypton-86 atom.

2 The definition of the metre in force since 1889, based on the international Prototype of platinum-iridium, is abrogated.

3 The international Prototype of the metre sanctioned by the 1st CGPM in 1889 shall be kept at the BIPM under the conditions specified in 1889.

### RESOLUTION 7

The 11th CGPM

*requests* the CIPM

1 to prepare specifications for the realization of the new definition of the metre<sup>11</sup>;

2 to select secondary wavelength standards for measurement of length by interferometry, and to prepare specifications for their use;

3 to continue the work in progress on improvement of length standards.

<sup>11</sup> See Appendix 2, p 35, for the relevant Recommendation adopted by the CIPM.

*Definition of the unit of time (CR, 86)*

RESOLUTION 9

The 11th CGPM  
*considering*

the powers given to the CIPM by the 10th CGPM, to define the fundamental unit of time,  
the decision taken by the CIPM in 1956,  
*ratifies* the following definition:

“The second is the fraction  $1/31\,556\,925.974\,7$  of the tropical year for 1900 January 0 at 12 hours ephemeris time”.

*International System of Units (CR, 87)*

RESOLUTION 12

The 11th CGPM  
*considering*

Resolution 6 of the 10th CGPM, by which it adopted six base units on which to establish a practical system of measurement for international use:

length -----	metre	m
mass -----	kilogram	kg
time -----	second	s
electric current -----	ampere	A
thermodynamic temperature -----	degree Kelvin	°K
luminous intensity -----	candela	cd

Resolution 3 adopted by the CIPM in 1956,

The recommendations adopted by the CIPM in 1958 concerning an abbreviation for the name of the system, and prefixes to form multiples and sub-multiples of the units,

*decides*

- 1 the system founded on the six base units above is called “International System of Units”;
- 2 the international abbreviation of the name of the system is: SI;

3 names of multiples and sub-multiples of the units are formed by means of the following prefixes:

Multiplying factor	Prefix	Symbol
1 000 000 000 000 = $10^{12}$	tera	T
1 000 000 000 = $10^9$	giga	G
1 000 000 = $10^6$	mega	M
1 000 = $10^3$	kilo	k
100 = $10^2$	hecto	h
10 = $10^1$	deka	da
0.1 = $10^{-1}$	deci	d
0.01 = $10^{-2}$	centi	c
0.001 = $10^{-3}$	milli	m
0.000 001 = $10^{-6}$	micro	$\mu$
0.000 000 001 = $10^{-9}$	nano	n
0.000 000 000 001 = $10^{-12}$	pico	p

4 the units listed below are used in the system, without excluding others which might be added later

SUPPLEMENTARY UNITS			
plane angle .....	radian	rad	
solid angles .....	steradian	sr	
DERIVED UNITS			
area .....	square metre	$m^2$	
volume .....	cubic metre	$m^3$	
frequency .....	hertz	Hz	1/s
mass density (density) .....	kilogram per cubic metre	$kg/m^3$	
speed, velocity .....	metre per second	m/s	
angular velocity .....	radian per second	rad/s	
acceleration .....	metre per second squared	$m/s^2$	
angular acceleration .....	radian per second squared	$rad/s^2$	
force .....	newton	N	$kg \cdot m/s^2$
pressure (mechanical stress) .....	newton per square metre	$N/m^2$	
kinematic viscosity .....	square metre per second	$m^2/s$	
dynamic viscosity .....	newton-second per square metre	$N \cdot s/m^2$	
work, energy, quantity of			
heat .....	joule	J	$N \cdot m$
power .....	watt	W	J/s
quantity of electricity .....	coulomb	C	$A \cdot s$
potential difference,			
electromotive force .....	volt	V	W/A
electric field strength .....	volt per metre	V/m	
electric resistance .....	ohm	$\Omega$	V/A
capacitance .....	farad	F	$A \cdot s/V$
magnetic flux .....	weber	Wb	V·s
inductance .....	henry	H	V·s/A
magnetic flux density .....	tesla	T	Wb/m <sup>2</sup>
magnetic field strength .....	ampere per metre	A/m	
magnetomotive force .....	ampere	A	
luminous flux .....	lumen	lm	cd·sr
luminance .....	candela per square metre	$cd/m^2$	
illuminance .....	lux	lx	$lm/m^2$

RESOLUTION 13

The 11th CGPM,  
*considering*

that the cubic decimetre and the litre are unequal and differ by about 28 parts in  $10^6$ ,

that determinations of physical quantities which involve measurements of volume are being made more and more accurately, thus increasing the risk of confusion between the cubic decimetre and the litre,

*requests* the CIPM to study the problem and submit its conclusions to the 12th CGPM.

CIPM, 1961

*Cubic decimetre and litre* (PV, 29, 34)

RECOMMENDATION

The CIPM recommends that the results of accurate measurements of volume be expressed in units of the International System and not in litres.

12th CGPM, 1964

*Atomic standard of frequency* (CR, 93)

RESOLUTION 5

The 12th CGPM,  
*considering*

that the 11th CGPM noted in its Resolution 10 the urgency, in the interests of accurate metrology, of adopting an atomic or molecular standard of time interval, that, in spite of the results already obtained with cesium atomic frequency standards, the time has not yet come for the CGPM to adopt a new definition of the second, base unit of the International System of Units, because of the new and considerable improvements likely to be obtained from work now in progress,

*considering also* that it is not desirable to wait any longer before time measurements in physics are based on atomic or molecular frequency standards,

*empowers* the CIPM to name the atomic or molecular frequency standards to be employed for the time being,

*requests* the Organizations and Laboratories knowledgeable in this field to pursue work connected with a new definition of the second.



DECLARATION OF THE CIPM (1964) (PV, 32, 26 and CR, 93)  
The CIPM,

*empowered* by Resolution 5 of the 12th CGPM to name atomic or molecular frequency standards for temporary use for time measurements in physics,

*declares* that the standard to be employed is the transition between the hyperfine levels  $F = 4, M = 0$  and  $F = 3, M = 0$  of the ground state  $^2S_{1/2}$  of the cesium-133 atom, unperturbed by external fields, and that the frequency of this transition is assigned the value 9 192 631 770 hertz.

*Litre* (CR, 93)

#### RESOLUTION 6

The 12th CGPM,

*considering* Resolution 13 adopted by the 11th CGPM in 1960 and the Recommendation adopted by the CIPM in 1961,

1 *abrogates* the definition of the litre given in 1901 by the 3rd CGPM

2 *declares* that the word "litre" may be employed as a special name for the cubic decimetre,

3 *recommends* that the name litre should not be employed to give the results of high accuracy volume measurements.

*Curie* (CR, 94)

#### RESOLUTION 7

The 12th CGPM,

*considering* that the curie has been used for a long time in many countries as a unit of activity for radionuclides,

*recognizing* that in the International System of Units (SI), the unit of this activity is the second to the power of minus one ( $s^{-1}$ ),

*accepts* that the curie be still retained outside SI as unit of activity, with the value  $3.7 \times 10^{10} s^{-1}$ . The symbol for this unit is Ci.

*Prefixes femto and atto* (CR, 94)

#### RESOLUTION 8

The 12 CGPM,

*decides* to add to the list of prefixes for the formation of names of multiples and sub-multiples of units, adopted by the 11th CGPM, Resolution 12, paragraph 3, the following two new prefixes:

Multiplying factor	Prefix	Symbol
$10^{-15}$	femto	f
$10^{-18}$	atto	a

## 13th CGPM, 1967-1968

*SI unit of time (second)* (CR, 103)

### RESOLUTION 1

The 13th CGPM,

*considering*

that the definition of the second adopted by the CIPM in 1956 (Resolution 1) and ratified by Resolution 9 of the 11th CGPM (1960), later upheld by Resolution 5 of the 12th CGPM (1964), is inadequate for the present needs of metrology,

that at its meeting of 1964 the CIPM, empowered by Resolution 5 of the 12th CGPM (1964) recommended, in order to fulfil these requirements, a cesium atomic frequency standard for temporary use,

that this frequency standard has now been sufficiently tested and found sufficiently accurate to provide a definition of the second fulfilling present requirements,

that the time has now come to replace the definition now in force of the unit of time of the International System of Units by an atomic definition based on that standard,

*decides*

1 The unit of time of the International System of Units is the second defined as follows:

"The second is the duration of 9 192 631 770 periods of the radiation corresponding to the transition between the two hyperfine levels of the ground state of the cesium-133 atom".

2 Resolution 1 adopted by the CIPM at its meeting of 1956 and Resolution 9 of the 11th CGPM are now abrogated.

*Unit of thermodynamic temperature (kelvin)* (CR, 104)

### RESOLUTION 3

The 13th CGPM

*considering*

the names "degree Kelvin" and "degree", the symbols "°K" and "deg" and the rules for their use given in Resolution 7 of the 9th CGPM (1948), in Resolution 12 of the 11th CGPM (1960) and the decision taken by the CIPM in 1962 (PV, 30, 27)<sup>12</sup>, that the unit of thermodynamic temperature and the unit of temperature interval are one and the same unit, which ought to be denoted by a single name and single symbol,

<sup>12</sup> "1 The unit degree Kelvin (symbol °K) may be employed for a difference of two thermodynamic temperatures as well as for thermodynamic temperature itself.

"2 If it is found necessary to suppress the name Kelvin, the international symbol "deg" is recommended for the unit of difference of temperature. (The symbol "deg" is read, for example: "degré" in French, "degree" in English, "gradous" (градус) in Russian, "Grad" in German, "graad" in Dutch").

*decides*

1 the unit of thermodynamic temperature is denoted by the name "kelvin" and its symbol is "K";

2 the same name and the same symbol are used to express a temperature interval;

3 a temperature interval may also be expressed in degrees Celsius;

4 the decisions mentioned in the opening paragraph concerning the name of the unit of thermodynamic temperature, its symbol and the designation of the unit to express an interval or a difference of temperatures are abrogated, but the usages which derive from these decisions remain permissible for the time being.

#### RESOLUTION 4

The 13th CGPM,

*considering* that it is useful to formulate more explicitly the definition of the unit of thermodynamic temperature contained in Resolution 3 of the 10th CGPM (1954),

*decides* to express this definition as follows:

"The kelvin, unit of thermodynamic temperature, is the fraction  $1/273.16$  of the thermodynamic temperature of the triple point of water".

*Unit of luminous intensity (candela) (CR, 104)*

#### RESOLUTION 5

The 13th CGPM

*considering*

the definition of the unit of luminous intensity ratified by the 9th CGPM (1948) and contained in the "Resolution concerning the change of photometric units" adopted by the CIPM in 1946 (PV, 20, 119) in virtue of the powers conferred by the 8th CGPM (1933),

that this definition fixes satisfactorily the unit of luminous intensity, but that its wording may be open to criticism,

*decides* to express the definition of the candela as follows:

"The candela is the luminous intensity, in the perpendicular direction, of a surface of  $1/600\,000$  square metre of a blackbody at the temperature of freezing platinum under a pressure of  $101\,325$  newtons per square metre."



## *Derived units* (CR, 105)

### RESOLUTION 6

#### The 13th CGPM

*considering* that it is useful to add some derived units to the list of paragraph 4 of Resolution 12 of the 11th CGPM (1960),  
*decides* to add:

wave number .....	1 per metre	$\text{m}^{-1}$
entropy .....	joule per kelvin	$\text{J/K}$
specific heat capacity .....	joule per kilogram kelvin	$\text{J}/(\text{kg}\cdot\text{K})$
thermal conductivity .....	watt per metre kelvin	$\text{W}/(\text{m}\cdot\text{K})$
radiant intensity .....	watt per steradian	$\text{W/sr}$
activity (of a radioactive source) .....	1 per second	$\text{s}^{-1}$

*Abrogation of earlier decisions (micron, new candle)* (CR, 105)

### RESOLUTION 7

#### The 13th CGPM,

*considering* that subsequent decisions of the General Conference concerning the International System of Units are incompatible with parts of Resolution 7 of the 9th CGPM (1948),

*decides* accordingly to remove from Resolution 7 of the 9th Conference:

- 1 the unit name "micron", and the symbol " $\mu$ " which had been given to that unit, but which has now become a prefix;
- 2 the unit name "new candle".

### CIPM, 1967

*Decimal multiples and sub-multiples of the unit of mass* (PV 35, 29)

### RECOMMENDATION 2

#### The CIPM,

*considering* that the rule for forming names of decimal multiples and sub-multiples of the units of paragraph 3 of Resolution 12 of the 11th CGPM (1960) might be interpreted in different ways when applied to the unit of mass,

*declares* that the rules of Resolution 12 of the 11th CGPM apply to the kilogram in the following manner: the names of decimal multiples and sub-multiples of the unit of mass are formed by attaching prefixes to the word "gram".

## CIPM, 1969

*International System of Units: Rules for application of Resolution 12 of the 11th CGPM (1960) (PV, 37, 30)*

### RECOMMENDATION 1 (1969)

The CIPM,  
*considering* that Resolution 12 of the 11th CGPM (1960) concerning the International System of Units, has provoked discussions on certain of its aspects,  
*declares*

1 the base units, the supplementary units, and the derived units, of the International System of Units, which form a coherent set, are denoted by the name "SI units";

2 the prefixes adopted by the CGPM for the formation of decimal multiples and sub-multiples of SI units are called "SI prefixes";  
*and recommends*

3 the use of SI units, and of their decimal multiples and sub-multiples whose names are formed by means of SI prefixes.

*Note.*—The name "supplementary units", appearing in Resolution 12 of the 11th CGPM (and in the present Recommendation) is given to SI units for which the General Conference declines to state whether they are base units or derived units.

*Unit of amount of substance (mole)*

*Draft*<sup>13</sup>

#### The 14th CGPM

*considering* the advice of the International Union of Pure and Applied Physics, of the International Union of Pure and Applied Chemistry, and of the International Organization for Standardization, concerning the need to define a unit of amount of substance,

*decides*

1 The mole is the amount of substance of a system which contains as many elementary entities as there are atoms in 0.012 kilogram of carbon 12; its symbol is mol.

2 When the mole is used, the elementary entities must be specified and may be atoms, molecules, ions, electrons, other particles, or specified groups of such particles.

3 The mole is a base unit of the International System of Units.

<sup>13</sup> The CIPM (October 1969) has agreed to submit to the 14th CGPM in 1971 this draft proposed by the Consultative Committee for Units (CCU, 2nd session, 1969, page U 20).

## APPENDIX II

### Practical realization of the definitions of some important units

#### 1. Length

The following recommendation was adopted by the CIPM in 1960 to specify the characteristics of the discharge lamp radiating the standard line of krypton 86:

In accordance with paragraph 1 of Resolution 7 adopted by the 11th CGPM (October 1960) the CIPM recommends that the line of krypton 86 adopted as primary standard of length be realized by means of a hot cathode discharge lamp containing krypton 86 of purity not less than 99% in sufficient quantity to ensure the presence of solid krypton at a temperature of 64 °K. The lamp shall have a capillary of internal diameter 2 to 4 millimetres, and wall thickness approximately 1 millimetre.

It is considered that, provided the conditions listed below are satisfied, the wavelength of the radiation emitted by the positive column is equal to the wavelength corresponding to the transition between the unperturbed levels to within 1 in  $10^8$ :

1. the capillary is observed end-on in a direction such that the light rays used travel from the cathode end to the anode end;

2. the lower part of the lamp including the capillary is immersed in a bath maintained to within 1 degree of the temperature of the triple point of nitrogen;

3. the current density in the capillary is  $0.3 \pm 0.1$  ampere per square centimetre.

(*Procès-Verbaux CIPM*, 1960, 28, 71; *Comptes rendus 11th CGPM*, 1960, 85)

The ancillary apparatus comprises the stabilized current supply for the lamp, a vacuum-tight cryostat, a thermometer for use in the region of 63 K, a vacuum pump, and either a monochromator, to isolate the line or special interference filters.

The wavelength of the standard line, reproducible to 1 in  $10^8$  according to the above specifications, might be made reproducible to 1 in  $10^9$  approximately with more stringent specifications.

Other lines of krypton 86 and several lines of mercury 198 and of cadmium 114 are recommended as secondary standards (*Procès-Verbaux CIPM*, 1963, 31, Recommendation 1, 26 and *Comptes rendus 12th CGPM*, 1964, 18).

The wavelength of these lines varies with pressure, temperature, and composition of the air in which the light travels; the refractive index of the air must therefore in general be measured *in situ*.

To measure end or line standards these radiations are used in an interference comparator a complicated instrument with mechanical, optical interference, and thermometric components.

#### 2. Mass

The primary standard of the unit of mass is the international prototype of the kilogram kept at the BIPM. The mass of 1 kg

secondary standards of platinum-iridium or of stainless steel is compared with the mass of the prototype by means of balances whose precision can reach 1 in  $10^8$  or better.

By an easy operation a series of masses can be standardized to obtain multiples and sub-multiples of the kilogram.

### 3. Time

Some laboratories are able to make the equipment required to produce electric oscillations at the frequency of vibration of the atom of cesium-133 which defines the second. This equipment includes a quartz oscillator, frequency multipliers and synthesizers, a klystron, phase-sensitive detectors, an apparatus for producing an atomic beam of cesium in vacuum, cavity resonators, uniform and non-uniform magnetic fields, and an ion detector.

Complete assemblies to produce this frequency are also commercially available.

By division it is possible to obtain pulses at the desired frequencies, for instance 1 Hz, 1 kHz, etc.

The stability and the reproducibility can exceed 1 in  $10^{11}$ .

Radio stations broadcast waves whose frequencies are known to about the same accuracy.

Time signals also are broadcast by radio waves. These signals are at present given in a time scale called "Coordinated Universal Time (UTC)", in which the second is larger than that defined by the CGPM, in order that the day of 86 400 seconds should be approximately equal to the present period of rotation of the Earth (this period is known to be irregular).

Since 1966 for example, the following offset has been agreed upon:

$$\frac{1 \text{ second (UTC)}}{1 \text{ second (true)}} = 1 + 300 \times 10^{-10}$$

Moreover, the first minute of each month is sometimes increased or decreased by 1 or more tenths of a second, in order to allow for the change in the period of rotation of the Earth.

The carrier frequency, expressed in hertz, is in general a round number decreased by the offset above in order to maintain the phase relation between the carrier and the time signals. Waves without offset are also broadcast.

There are other standards besides the cesium beam, among them the hydrogen maser, rubidium clocks, quartz frequency standards and clocks, etc. Their frequency is controlled by comparison with a cesium standard, either directly, or by means of radio transmissions.



## 4. Electric quantities

So-called "absolute" electrical measurements, i.e. those that realize the unit according to its definition, can be undertaken only by laboratories enjoying exceptional facilities.

Electric current is obtained in amperes by measuring the force between two coils, of measurable shape and size, that carry the current.

The ohm, the farad, and the henry are accurately linked by impedance measurements at a known frequency, and may be determined in absolute value by calculation (1) of the self-inductance of a coil, or the mutual inductance of two coils, in terms of their linear dimensions, or (2) of the change in capacitance of a capacitor in terms of the change in length of its electrodes (method of Thompson-Lampard).

The volt is deduced from the ampere and the ohm.

The accuracy of these measurements lies between 1 and 3 in  $10^6$ .

The results of absolute measurements are obtained by means of secondary standards which are, for instance:

1. coils of manganin wire for resistance standards;
2. galvanic cells with cadmium sulphate electrolyte for standards of electromotive force;
3. capacitors for standards of capacitance (of 10 pF for example).

Application of recent techniques also provides means of checking the stability of the secondary standards which maintain the electric units: measurement of the gyromagnetic ratio of the proton  $\gamma_p'$  for the ampere, measurement of the ratio  $h/e$  by the Josephson effect for the volt.

## 5. Temperature

Absolute measurements of temperature in accordance with the definition of the unit of thermodynamic temperature, the kelvin, are related to thermodynamics, for example by the gas thermometer.

At 273.16 K accuracy is of the order of 1 in  $10^6$ , but it is not as good at higher and at lower temperatures.

The International Practical Temperature Scale adopted by the CIPM in 1968 agrees with the best thermodynamic results to date. The text on this scale (which replaces the 1948 scale, amended in 1960) is published in *Comité Consultatif de Thermométrie*, 8th session, 1967, Annexe 18, and *Comptes rendus*, 13th CGPM, 1967-1968, Annexe 2; the English translation is published in *Metrologia*, 5, 35, 1969.

The instruments employed to measure temperatures in the International Scale are the platinum resistance thermometer, the platinum-10% rhodium/platinum thermocouple and the monochromatic optical



pyrometer. These instruments are calibrated at a number of reproducible temperatures, called "defining fixed points," the values of which are assigned by agreement.

## 6. Photometric quantities

Absolute photometric measurements by comparison with the luminance of a blackbody at the temperature of freezing platinum can only be undertaken by a few well-equipped laboratories. The accuracy of these measurements is somewhat better than 1%.

The results of these measurements are maintained by means of incandescent lamps fed with d.c. in a specified manner. These lamps constitute standards of luminous intensity and of luminous flux.

The method approved in 1937 (Procès-Verbaux CIPM, 18, 237) for determining the value of photometric quantities for luminous sources having a color other than that of the primary standard, utilizes a procedure taking account of the "spectral luminous efficiencies"  $V(\lambda)$  adopted by it in 1933. They were at that time known as "relative visibility (or luminosity) factors", and had been recommended by the CIE in 1924.

Photometric quantities are thereby defined in purely physical terms as quantities proportional to the sum or integral of a spectral power distribution, weighted according to a specified function of wavelength.

## 7. Amount of substance

All quantitative results of chemical analysis or of dosages can be expressed in moles, in other words in units of amount of substance of the constituent particles. The principle of physical measurements based on the definition of this unit is explained below.

The simplest case is that of a sample of a pure substance that is considered to be formed of atoms; call  $X$  the chemical symbol of these atoms. A mole of atoms  $X$  contains by definition as many atoms as there are  $^{12}\text{C}$  atoms in 0.012 kilogram of carbon 12. As neither the mass  $m(^{12}\text{C})$  of an atom of carbon 12 nor the mass  $m(X)$  of an atom  $X$  can be measured accurately, we use the ratio of these masses,  $m(X)/m(^{12}\text{C})$ , which can be accurately determined.<sup>14</sup> The mass corresponding to 1 mole of  $X$  is then  $[m(X)/m(^{12}\text{C})] \times 0.012$  kg, which is expressed by saying that the molar mass  $M(X)$  of  $X$  (quotient of mass by amount of substance) is

$$M(X) = [m(X)/m(^{12}\text{C})] \times 0.012 \text{ kg/mol.}$$

<sup>14</sup> There are many methods of measuring this ratio, the most direct one being by the mass spectrograph.

For example, the atom of fluorine  $^{19}\text{F}$  and the atom of carbon  $^{12}\text{C}$  have masses which are in the ratio 18.9984/12. The molar mass of the molecular gas  $\text{F}_2$  is:

$$M(\text{F}_2) = \frac{2 \times 18.9984}{12} \times 0.012 \text{ kg/mol} = 0.0379968 \text{ kg/mol}.$$

The amount of substance corresponding to a given mass of gas  $\text{F}_2$ , 0.05 kg for example, is:

$$\frac{0.05 \text{ kg}}{0.0379968 \text{ kg} \cdot \text{mol}^{-1}} = 1.31590 \text{ mol}$$

In the case of a pure substance that is supposed made up of molecules B, which are combinations of atoms X, Y, . . . according to the chemical formula  $\text{B} = \text{X}_\alpha \text{Y}_\beta \dots$ , the mass of one molecule is  $m(\text{B}) = \alpha m(\text{X}) + \beta m(\text{Y}) + \dots$ .

This mass is not known with accuracy, but the ratio  $m(\text{B})/m(^{12}\text{C})$  can be determined accurately. The molar mass of a molecular substance B is then

$$M(\text{B}) = \frac{m(\text{B})}{m(^{12}\text{C})} \times 0.012 \text{ kg/mol} = \left\{ \alpha \frac{m(\text{X})}{m(^{12}\text{C})} + \beta \frac{m(\text{Y})}{m(^{12}\text{C})} + \dots \right\} \times 0.012 \text{ kg/mol}$$

The same procedure is used in the more general case when the composition of the substance B is specified as  $\text{X}_\alpha \text{Y}_\beta \dots$  even if  $\alpha, \beta, \dots$  are not integers. If we denote the mass ratios  $m(\text{X})/m(^{12}\text{C})$ ,  $m(\text{Y})/m(^{12}\text{C})$ , . . . by  $r(\text{X})$ ,  $r(\text{Y})$ , . . ., the molar mass of the substance B is given by the formula:

$$M(\text{B}) = [\alpha r(\text{X}) + \beta r(\text{Y}) + \dots] \times 0.012 \text{ kg/mol}.$$

There are other methods based on the laws of physics and physical chemistry for measuring amounts of substance; three examples are given below.

With perfect gases, 1 mole of particles of any gas occupies the same volume at a temperature  $T$  and a pressure  $p$  (approximately  $0.0224 \text{ m}^3$  at  $T = 273.16 \text{ K}$  and  $p = 101325 \text{ N/m}^2$ ); hence a method of measuring the ratio of amounts of substance for any two gases (the corrections to apply if the gases are not perfect are well known).

For quantitative electrolytic reactions the ratio of amounts of substance can be obtained by measuring quantities of electricity. For example, 1 mole of Ag and 1 mole of  $(1/2) \text{ Cu}$  are deposited on a cathode by the same quantity of electricity (approximately  $96487 \text{ C}$ ).

Application of the laws of Raoult is yet another method of determining ratios of amounts of substance in extremely dilute solutions.



Latest developments in the subject area of this publication, as well as in other areas where the National Bureau of Standards is active, are reported in the NBS Technical News Bulletin. See following page.

## HOW TO KEEP ABREAST OF NBS ACTIVITIES

Your purchase of this publication indicates an interest in the research, development, technology, or service activities of the National Bureau of Standards.

The best source of current awareness in your specific area, as well as in other NBS programs of possible interest, is the **TECHNICAL NEWS BULLETIN**, a monthly magazine designed for engineers, chemists, physicists, research and product development managers, librarians, and company executives.

If you do not now receive the **TECHNICAL NEWS BULLETIN** and would like to subscribe, and/or to review some recent issues, please fill out and return the form below.

Mail to: Office of Technical Information and Publications  
National Bureau of Standards  
Washington, D. C. 20234

Name \_\_\_\_\_

Affiliation \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

☐ Please send complimentary past issues of the Technical News Bulletin.

☐ Please enter my 1-yr subscription. Enclosed is my check or money order for \$3.00 (additional \$1.00 for foreign mailing).

*Check is made payable to: SUPERINTENDENT OF DOCUMENTS.*

Sp. Publ. 330



## NBS TECHNICAL PUBLICATIONS

### PERIODICALS

**JOURNAL OF RESEARCH** reports National Bureau of Standards research and development in physics, mathematics, chemistry, and engineering. Comprehensive scientific papers give complete details of the work, including laboratory data, experimental procedures, and theoretical and mathematical analyses. Illustrated with photographs, drawings, and charts.

*Published in three sections, available separately:*

#### ● Physics and Chemistry

Papers of interest primarily to scientists working in these fields. This section covers a broad range of physical and chemical research, with major emphasis on standards of physical measurement, fundamental constants, and properties of matter. Issued six times a year. Annual subscription: Domestic, \$9.50; foreign, \$11.75\*.

#### ● Mathematical Sciences

Studies and compilations designed mainly for the mathematician and theoretical physicist. Topics in mathematical statistics, theory of experiment design, numerical analysis, theoretical physics and chemistry, logical design and programming of computers and computer systems. Short numerical tables. Issued quarterly. Annual subscription: Domestic, \$5.00; foreign, \$6.25\*.

#### ● Engineering and Instrumentation

Reporting results of interest chiefly to the engineer and the applied scientist. This section includes many of the new developments in instrumentation resulting from the Bureau's work in physical measurement, data processing, and development of test methods. It will also cover some of the work in acoustics, applied mechanics, building research, and cryogenic engineering. Issued quarterly. Annual subscription: Domestic, \$5.00; foreign, \$6.25\*.

### TECHNICAL NEWS BULLETIN

The best single source of information concerning the Bureau's research, developmental, cooperative and publication activities, this monthly publication is designed for the industry-oriented individual whose daily work involves intimate contact with science and technology—for engineers, chemists, physicists, research managers, product-development managers, and company executives. Annual subscription: Domestic, \$3.00; foreign, \$4.00\*.

\* Difference in price is due to extra cost of foreign mailing.

### NONPERIODICALS

**Applied Mathematics Series.** Mathematical tables, manuals, and studies.

**Building Science Series.** Research results, test methods, and performance criteria of building materials, components, systems, and structures.

**Handbooks.** Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

**Special Publications.** Proceedings of NBS conferences, bibliographies, annual reports, wall charts, pamphlets, etc.

**Monographs.** Major contributions to the technical literature on various subjects related to the Bureau's scientific and technical activities.

**National Standard Reference Data Series.** NSRDS provides quantitative data on the physical and chemical properties of materials, compiled from the world's literature and critically evaluated.

**Product Standards.** Provide requirements for sizes, types, quality and methods for testing various industrial products. These standards are developed cooperatively with interested Government and industry groups and provide the basis for common understanding of product characteristics for both buyers and sellers. Their use is voluntary.

**Technical Notes.** This series consists of communications and reports (covering both other agency and NBS-sponsored work) of limited or transitory interest.

**Federal Information Processing Standards Publications.** This series is the official publication within the Federal Government for information on standards adopted and promulgated under the Public Law 89-306, and Bureau of the Budget Circular A-86 entitled, Standardization of Data Elements and Codes in Data Systems.

Order NBS publications from:

Superintendent of Documents  
Government Printing Office  
Washington, D.C. 20402

U.S. DEPARTMENT OF COMMERCE  
WASHINGTON, D.C. 20230

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300



POSTAGE AND FEES PAID  
U.S. DEPARTMENT OF COMMERCE